

P.H.D.



Hand operated chain-hoist from 250 to 10000 kg

 **VERLINDE**
LIFTING EQUIPMENT

2, boulevard de l'Industrie - B.P. 59 - 28501 Vernouillet cedex - France

Tel. : (33) 02 37 38 95 95 - Fax : (33) 02 37 38 95 99

Internet : www.verlinde.com


JV 03 2003 11 UGB

P.H.D.

Hand operated chain-hoist from 250 to 10000 kg

GENERAL CHARACTERISTICS

- **Attractive / Compact Design**
Impressive
- **Performance / 1 Year Guarantee**
- The new **P.H.D. HOIST** concept gives reliability with style.
- Its design and conception with a safety coefficient of 5 enables **VERLINDE** to supply a competitive quality product.
- The **P.H.D. HOIST** offers safety together with reduced weight and a minimum maintenance.
- The **P.H.D. HOIST** is tested according to current standards, is supplied with test certificate and a 1 year guarantee.
- **Mechanical components** : Heat treated pinions, shaft, gears.
- **Hooks** : Alloy steel heat treated with safety catch.
- **Brake** : Automatic self-sustaining.
- **Lifting chain**: conform to the NFE 26011 standard, safety coefficient 5, supplied in anti corrosion version.
- **Hand chain** : Electro zinc plated standard.

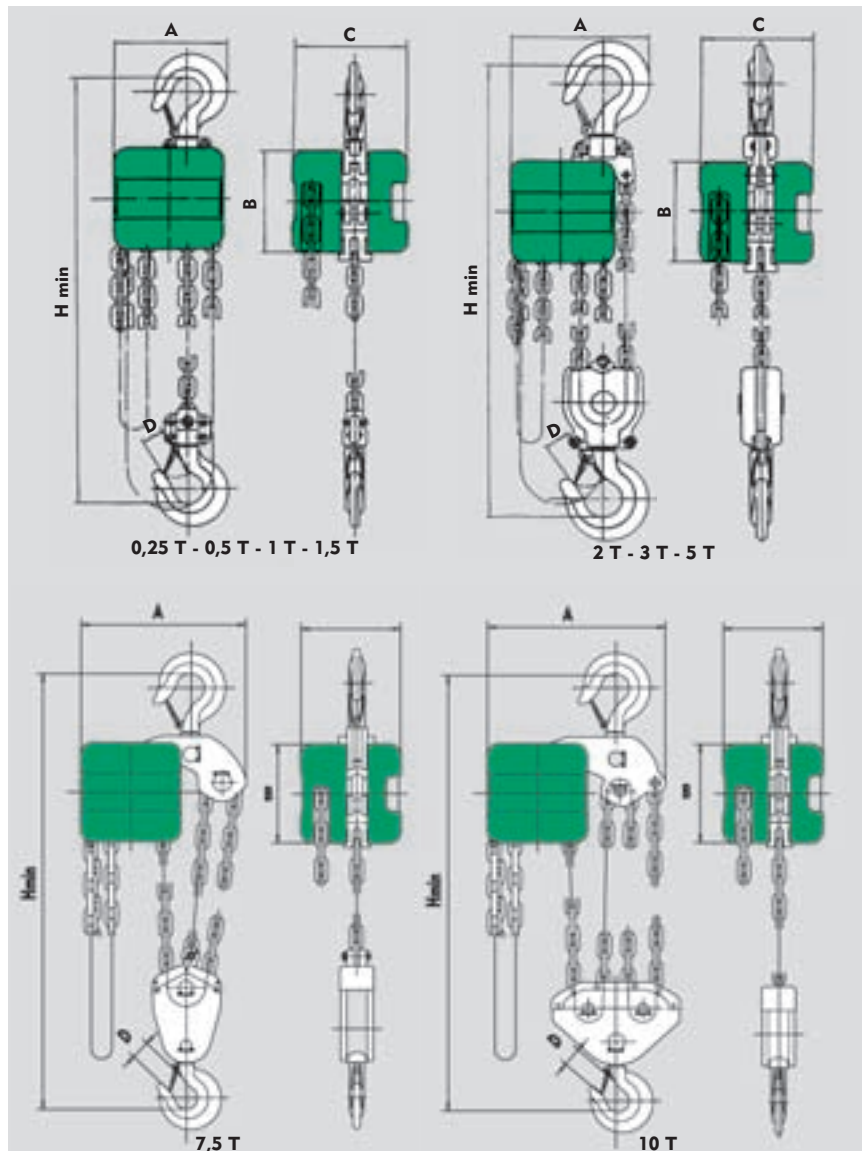

Characteristics and dimensions

SWL kg	Load chain		Approx. weight of hoist for 3 m lift kg	Effort on handchain kg	A mm	B mm	C mm	D mm	H min. mm
	No of falls	Ø of chain mm							
250	1	4x12	4	33	102	102	117	21	245
500	1	5x15	11	30	127	122	155	25	310
1000	1	6x18	12	40	146	138	155	30	350
1500	1	8x24	19	40	181	176	176	33	420
2000	2	6x18	18	40	186	138	155	35	480
3000	2	8x24	30	40	235	176	176	40	570
5000	2	9x27	40	40	270	200	182	48	615
6300	3	9x27	56	40	390	200	192	52	756
7500	3	9x27	56	40	390	200	192	52	756
10000	4	9x27	79	40	379	200	192	60	763



2, boulevard de l'Industrie - B.P. 59 - 28501 Vernouillet cedex - France

Tel. : (33) 02 37 38 95 95 - Fax : (33) 02 37 38 95 99

Internet : www.verlinde.com

JV 03 2003 11 UGB